



Carr. 869, Calle 4 Las Palmas Industrial Park, Cataño, Puerto Rico 00962

Tel. 787-641-2420

## Sterling CP-G48-T Thermostat Griddle with safety valve

### Model: CP-G48-T



The countertop line includes Griddle, Charbroiler, and Hot plate that can be adjusted to line up with even height for a great appearance in any cooking application. With robust construction, continuous output, and operator friendly controls, all equipment meets all commercial cooking demands!


### Features

- Four specifications of 24" 36 "48" 60 "on models 60,000, 90,000, 120,000, 150,000BTU/h
- Independent mechanical snap-action thermostatic controls Provide outstanding recovery and response time.
- 1" griddle plate
- Thermostat range 200° - 450° F (93°C - 232° C)
- Cool-to-the-touch front S/S edge
- All stainless steel cabinet
- Back and side splash guards fully welded to griddle plate
- Adjustable stainless steel non-skid feet
- Easy to remove 4 1/2" quart grease drawer with weep hole
- Shipped standard Natural gas, LP conversion kit included.

### Technical Data

Model	Gas Type	Burners	Total BTU	Overall Dimensions	Net Weight	Package Size	Shipping Weight
CP-G24-T	Natural Gas/ Liquid Propane	2	60,000	24" x 28.7"x15.5" 60.9x72.8x39.4 cm	192 lbs 71 kg	27.5"x35.5"x19.25" 70 x85x49 cm	240 lbs 109 kg
CP-G36-T	Natural Gas/ Liquid Propane	3	90,000	36" x 28.7"x15.5" 91.4x72.8 x 39.4 cm	273 lbs 100 kg	39.5"x35.5"x19.25" 100x85x49 cm	338 lbs 154 kg
CP-G48-T	Natural Gas/ Liquid Propane	4	120,000	48" x 28.7"x15.5" 122x72.8x39.4 cm	348 lbs 158 kg	51.25"x35.5"x19.25" 130x85x49 cm	424 lbs 193 kg
CP-G60-T	Natural Gas/ Liquid Propane	5	150,000	60" x 28.7"x15.5" 153x72.8x39.4 cm	484 lbs 220 kg	63"x35.5"x19.25" 160x85x49 cm	567 lbs 258 kg

## Dimensions

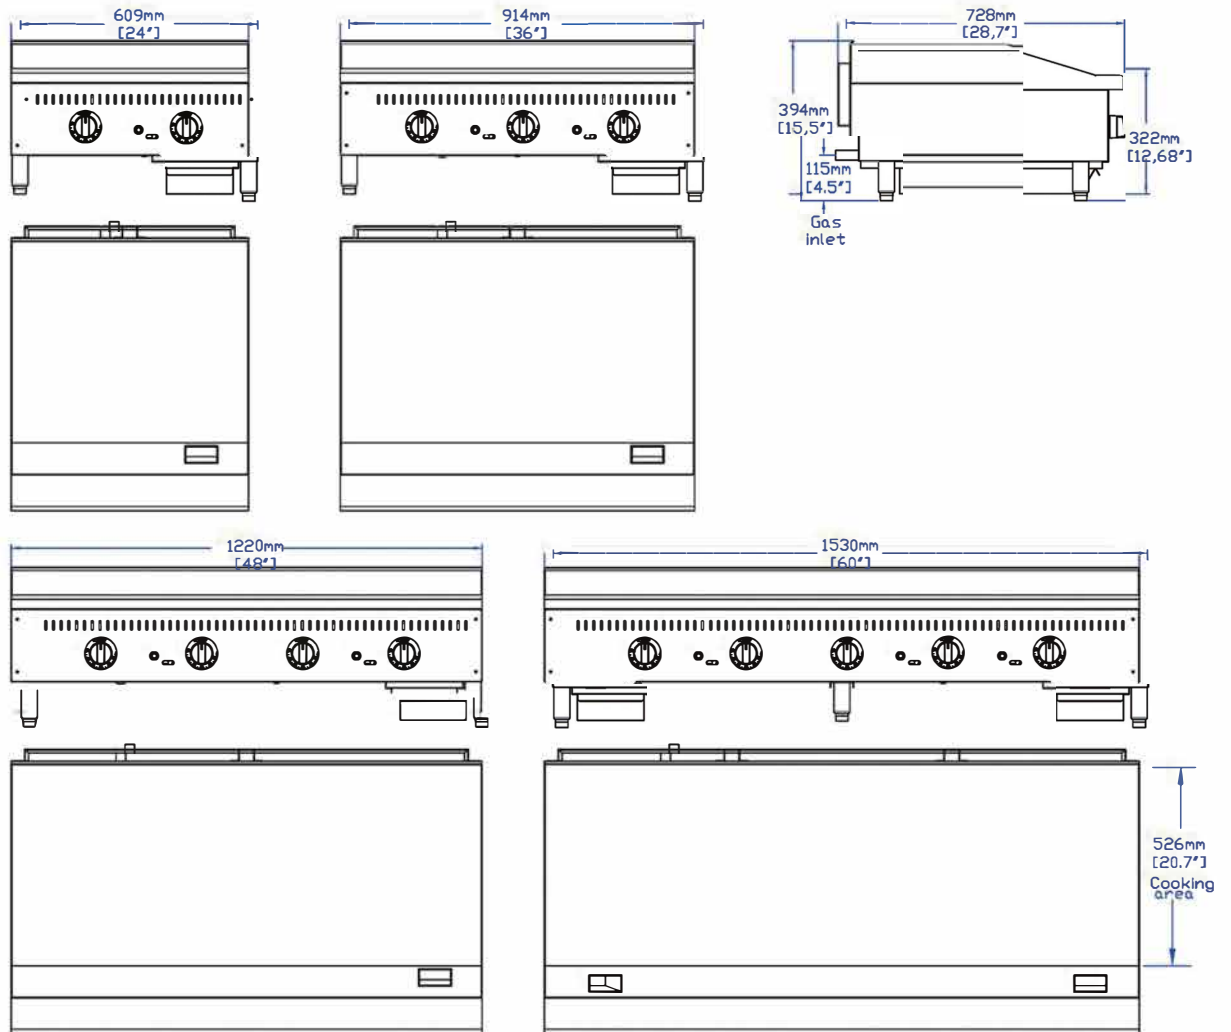

- This appliance is manufactured for commercial installation only, not intended for home use.
- 3/4" NPT rear gas connections. Supply gas pressure not to exceed 14" W.C.(1/2 PSI) Natural gas operating pressure - 4.0" W.C, Recommended supply pressure 7-9" W.C Propane gas operating pressure - 10.0" W.C, Recommended supply pressure 11-12" W.C
- A gas pressure regulator supplied with unit must be installed.
- An adequate ventilation system is required for Commercial Cooking Equipment.
- Require a 6" clearance at both side and rear adjacent to combustible construction.
- CSA design certified NSF listed.

## Certifications

