



728 Calle C, Parque Industrial Mario Julia, San Juan, PR 00920

Tel. 787-522-1011

Sterling SGD2-54R-SS Reach-In Glass Door Refrigerator



Model: SGD2-54R-SS


Technical Data

Width	54 Inches
Depth	32 3/16 Inches
Height	82 1/2 Inches
Power Cord Length	96 Inches
Interior Width	49 3/8 Inches
Left Door Opening Width	22 9/16 Inches
Right Door Opening Width	22 9/16 Inches
Shelf Width	20 7/8 Inches
Interior Depth	27 1/8 Inches
Shelf Depth	25 3/16 Inches

Features

- Corrosion-resistant stainless steel exterior and interior with LED lighting
- Features 2 locking and self-closing doors with double-pane tempered glass
- Perforated interior rear air duct for better air flow
- Digital temperature controller with automatic defrost function
- R290 refrigerant; 115V; 1/4 hp

Dimensions

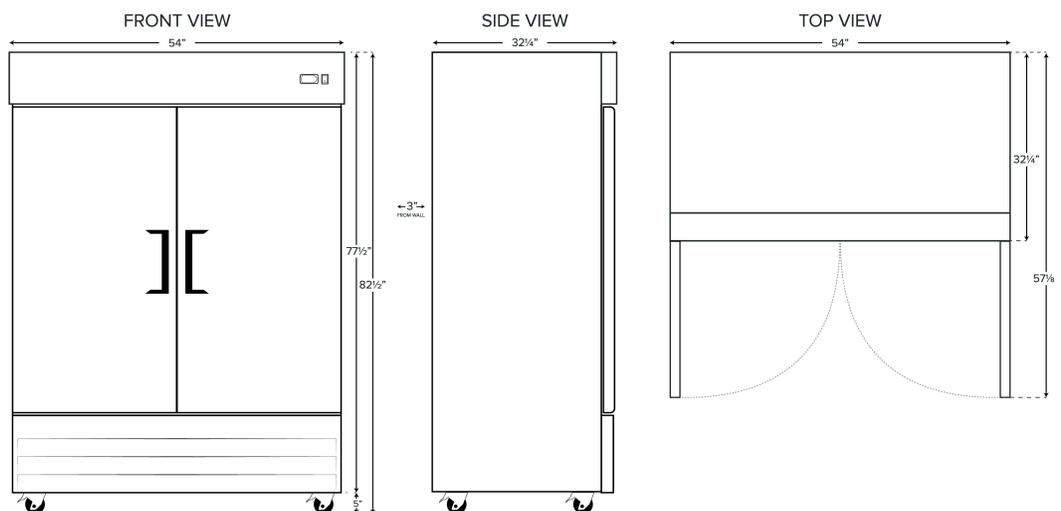

Technical Data

Interior Height	60 1/4 Inches
Amps	6.2 Amps
Hertz	60 Hz
Phase	1 Phase
Voltage	115 Volts
Wattage	516 Watts
Access Type	Doors
BTU (LBP)	1264 BTU
Capacity	46.65 cu. ft.
Capacity (per Shelf)	100 lb.
Casters	With Casters
Color	Silver
Compressor Location	Bottom Mounted
Construction	All Stainless Steel
Door Style	Swing
Door Type	Glass
Dutch Half Doors	Without Dutch Half Doors
Features	LED Lighting Removable Magnetic Door Gaskets
Handle Material	Aluminum Alloy
Hinge Location	Left Right
Horsepower	1/4 hp
Installation Type	Freestanding
Number of Doors	2 Doors
Number of Shelves	6 Shelves
Plug Type	NEMA 5-15P
Refrigerant Capacity	4.9 oz.
Refrigerant Type	R-290
Sections	2 Sections
Starting Amps	18.6 Amps
Starting Wattage	1548 Watts
Temperature Range	33 - 40 Degrees F
Type	Refrigerators

Certifications



5-15P



ETL Sanitation



ETL, US & Canada

OLDACH
REFRIGERATION, AIR CONDITIONING & VENTILATION SUPPLIER

www.sterlingprofessionalpr.com

