



728 Calle C, Parque Industrial Mario Julia, San Juan, PR 00920

Tel. 787-522-1011

## Sterling SSD2-54R Solid Door Reach-In Refrigerator



**Model: SSD2-54R**


### Technical Data

|                          |                |
|--------------------------|----------------|
| Width                    | 54 Inches      |
| Depth                    | 32 3/16 Inches |
| Height                   | 82 1/2 Inches  |
| Power Cord Length        | 96 Inches      |
| Interior Width           | 49 3/8 Inches  |
| Left Door Opening Width  | 22 9/16 Inches |
| Right Door Opening Width | 22 9/16 Inches |
| Shelf Width              | 23 1/4 Inches  |
| Interior Depth           | 27 1/8 Inches  |
| Shelf Depth              | 23 5/8 Inches  |

### Features

- Corrosion-resistant stainless steel exterior and aluminum interior with 304 stainless steel door
- Features 2 self-closing and stay-open locking doors
- Includes 6 epoxy coated shelves with 88 lb. capacity each
- Digital temperature controller with automatic defrost function
- R-290 refrigerant; 115V; 1/2 hp; 3.14 Amps

### Dimensions

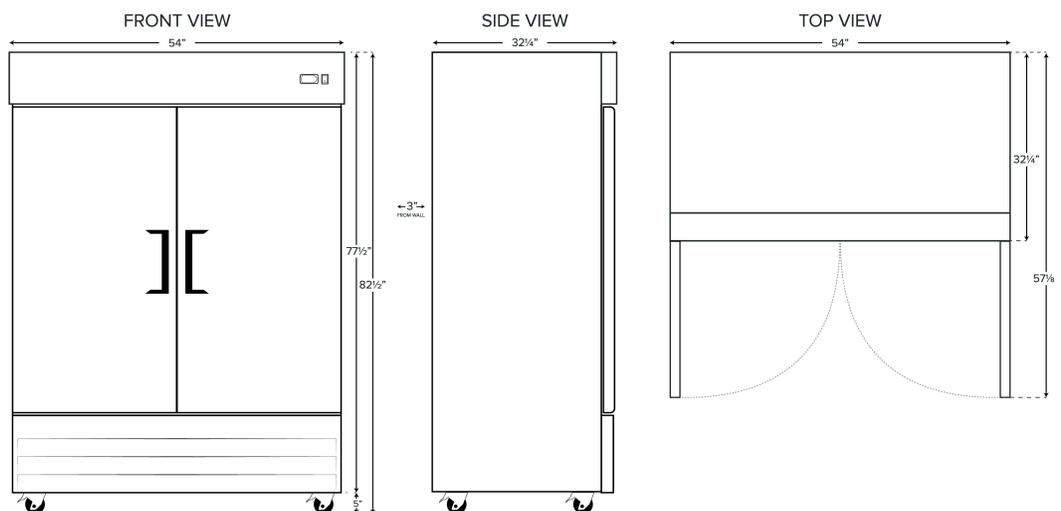

## Technical Data

|                           |                              |
|---------------------------|------------------------------|
| Interior Height           | 53 1/2 Inches                |
| Amps                      | 3.14 Amps                    |
| Hertz                     | 60 Hertz                     |
| Phase                     | 1 Phase                      |
| Voltage                   | 115 Volts                    |
| Access Type               | Doors                        |
| BTU (LBP)                 | 1264 BTU                     |
| Capacity                  | 46.65 cu. ft.                |
| Casters                   | With Casters                 |
| Color                     | Silver                       |
| Compressor Location       | Bottom Mounted               |
| Construction              | Stainless Steel and Aluminum |
| Door Style                | Swing                        |
| Door Type                 | Solid                        |
| Dutch Half Doors          | Without Dutch Half Doors     |
| Features                  | Self-Closing Doors           |
| Handle Material           | Plastic                      |
| Hinge Location            | Left/Right                   |
| Horsepower                | 1/2 HP                       |
| Individual Shelf Capacity | 88 lb.                       |
| Installation Type         | Freestanding                 |
| Number of Doors           | 2 Doors                      |
| Number of Shelves         | 6 Shelves                    |
| Plug Type                 | NEMA 5-15P                   |
| Refrigerant Capacity      | 4.6 oz.                      |
| Refrigerant Type          | R-290                        |
| Sections                  | 2 Sections                   |
| Temperature Range         | 33 - 40 Degrees F            |
| Type                      | Refrigerators                |

## Notes & Details

Your establishment relies on refrigeration for proper food safety, and with this Avantco A-49R-HC 54" solid door refrigerator, you receive performance you can depend on! A painted aluminum interior with a 304 stainless steel door gives you increased durability, while a 430 stainless steel door and exterior sides give it a sleek appearance. For convenience, 6 epoxy coated shelves feature shelf clips for customization when desired.

Designed to maintain temperatures from 33-40 degrees Fahrenheit, this refrigerator boasts a bottom-mounted 1/2 hp compressor that Uses R-290 refrigerant. This specialized refrigerant has an ozone depletion potential (ODP) of 0 and a global warming potential (GWP) of 3. In addition, the bottom-mounted design makes it easy for employees to load and unload products due to the raised bottom shelf. For optimal temperature retention, the entire cabinet is foamed-in place using polyurethane insulation. Other helpful features include stay open doors with locks, automatic defrosting, and a digital temperature control with digital display. This item requires a 115V electrical connection for operation. <

**⚠ WARNING:** This product can expose you to chemicals including lead, which are known to the State of California to cause cancer, birth defects, or other reproductive harm. For more information, go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov).

## Certifications



5-15P



ETL Sanitation



ETL, US & Canada

**OLDACH**  
REFRIGERATION, AIR CONDITIONING & VENTILATION SUPPLIER



[www.sterlingprofessionalpr.com](http://www.sterlingprofessionalpr.com)