



Carr. 869, Calle 4 Las Palmas Industrial Park, Cataño, Puerto Rico 00962

Tel. 787-641-2420

Sterling SSD3-82R Stainless Steel Solid Door Reach-In Refrigerator



Model: SSD3-82R


Technical Data

Width	81 5/16 Inches
Depth	32 3/16 Inches
Height	82 1/2 Inches
Power Cord Length	96 Inches
Interior Width	76 1/4 Inches
Left Door Opening Width	23 Inches
Middle Door Opening Width	22 7/8 Inches
Right Door Opening Width	23 Inches
Shelf Width	20 7/8 - 22 3/16 Inches
Interior Depth	27 1/8 Inches

Features

- Corrosion-resistant stainless steel exterior and interior with LED lighting
- Features 3 self-closing and stay-open locking doors with full length stainless steel handle
- Perforated interior rear air duct for better air ow
- Digital temperature controller with automatic defrost function
- R290 refrigerant; 115V, 4/5 hp; 3.37 amps

Dimensions

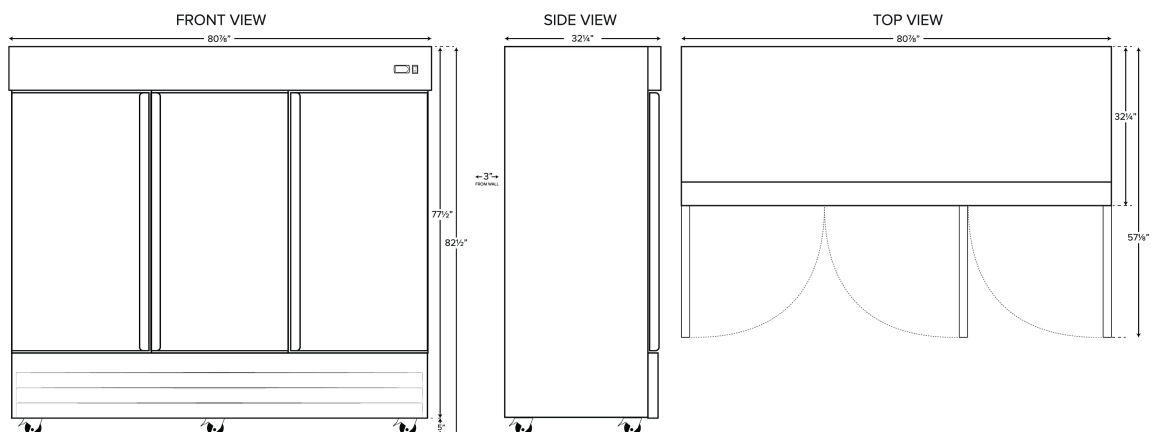

Technical Data

Shelf Depth	25 3/16 Inches
Interior Height	60 1/4 Inches
Amps	3.37 Amps
Hertz	60 Hertz
Phase	1 Phase
Voltage	115 Volts
Access Type	Doors
BTU (LBP)	2010 BTU
Capacity	72.04 cu. ft.
Casters	With Casters
Color	Silver
Compressor Location	Bottom Mounted
Construction	All Stainless Steel
Door Style	Swing
Door Type	Solid
Dutch Half Doors	Without Dutch Half Doors
Features	LED Lighting
Handle Material	Stainless Steel
Hinge Location	Left/Right
Horsepower	4/5 HP
Individual Shelf Capacity	100 lb.
Installation Type	Freestanding
Number of Doors	3 Doors
Number of Shelves	9 Shelves
Plug Type	NEMA 5-15P
Refrigerant Capacity	3.5 oz.
Refrigerant Type	R-290
Sections	3 Sections
Temperature Range	33 - 40 Degrees F

Certifications



OLDACH
REFRIGERATION, AIR CONDITIONING & VENTILATION SUPPLIER

www.sterlingprofessionalpr.com

