



728 Calle C, Parque Industrial Mario Julia, San Juan, PR 00920

Tel. 787-522-1011

## Sterling Bottle Filling Station & Single ADA Water Fountain

**Model: BFS+WC8P**



### Features

- The unit delivers chilling capacity 8.0 GPH of 50°F drinking water, based upon 68°F inlet water and 77°F ambient.
- Touchless sensor-activated water cooler with 20s shut-off timer
- 4 Electronic push-pars in the front and sides for bubbler activation
- Blue ticker indicates the numbers of 20 oz. plastic water bottle saved.
- Bottle filler offers a quick fill rate of 1.1 GPM.
- Laminar flow minimizes the water splash
- Vandal resistant 304SS bubbler
- Heavy duty 304 stainless steel frame
- Rear drainage system eliminates standing water
- ADA compliant water cooler
- Wall mounted (on wall), for indoor applications, serving 1 station

### Cooling System

#### Ice Tank Cooling

This cooling technology is high performance. It cools considerable quantities of water and enables the dispensing temperature to be kept constant even when continuously dispensing many litres.

#### Compressor

Hermetically-sealed, reciprocating type single phase, sealed-in lifetime lubrication.

#### Condenser

Fan cooled, copper tube with aluminum fins. Fan motor is permanently lubricated.


#### Refrigerant Control

Refrigerant HCF-134a is controlled by accurately calibrated capillary tube.

#### Temperature Control

Easily accessible enclosed adjustable thermostat is factory pre-set. Requires no adjustment other than for altitude requirements.

## Dimensions

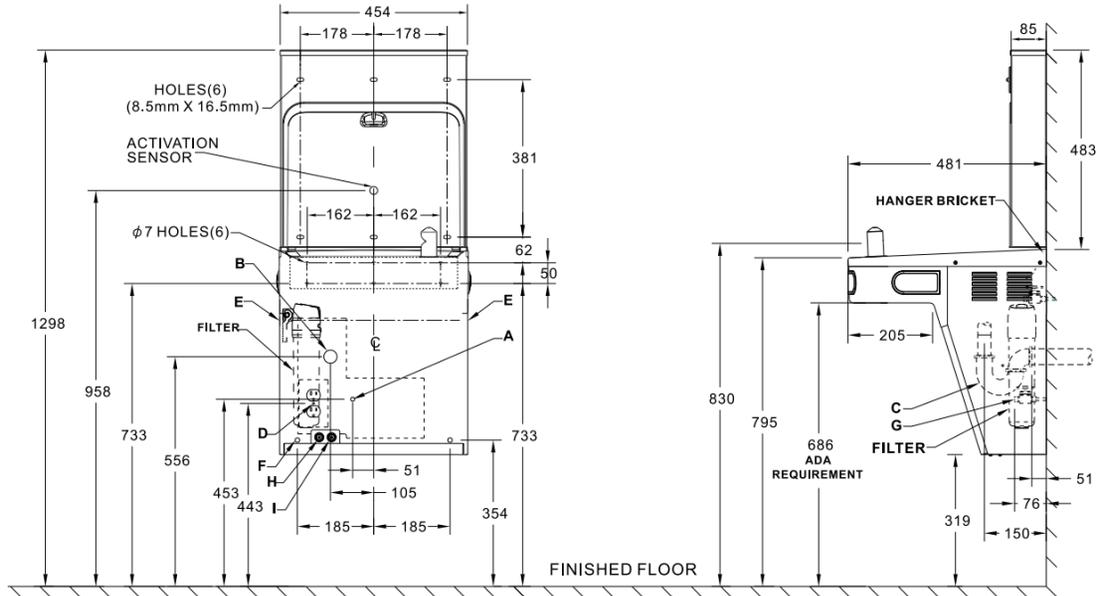

## Technical Data

|                          |  |
|--------------------------|--|
| Model                    | BFS+WC8P   |
| Special Features         | Hands-free, Blue Ticker, Chilled Water, Laminar Flow, Rear Drain     |
| Finish                   | 304 Stainless Steel  |
| No. of Stations Served   | 1  |
| Power                    | 115V/60Hz or 220V/50Hz   |
| Filter/UV Sterilizer     | Optional   |
| Activation by            | Electronic Bottler Filler Sensor & 4 electronic pushbars for Bubbler |
| Bubbler Style            | Vandal-resistant Stainless Bubbler                                   |
| Mounting Type            | Wall Mount (On Wall)   |
| Installation Location    | Indoor   |
| Cold Water Temperature   | 38-50°F (3-10°C)   |
| Cooling Capacity         | 8GPH(30L/H)  |
| Refrigerant Gas          | R134a  |
| Rated Watts              | 250W(8GPH)   |
| Working Room Temperature | 41-107.6°F (5-42°C)  |
| Dimensions(LxWxH)        | 18"x19"x38.6"  |
| Approx. Shipping Weight  | 70lbs / 32kg   |

## Certifications



**OLDACH**  
REFRIGERATION, AIR CONDITIONING & VENTILATION SUPPLIER



[www.sterlingprofessionalpr.com](http://www.sterlingprofessionalpr.com)