



728 Calle C, Parque Industrial Mario Julia, San Juan, PR 00920

Tel. 787-522-1011

Sterling Gas Charbroiler

Model: SP-CB36-M



The countertop line includes Griddle, Charbroiler, and Hot plate that can be adjusted to line up with even height for a great appearance in any cooking application. With robust construction, continuous output, and operator friendly controls, all equipment meets all commercial cooking demands!


Features

- "U" shape burners provide even heat distribution each 12"
- Adjustable pilot light lit from front of unit
- Cast iron grates are reversible for level or inclined broiling positions.
- 35,000 BTU / burner
- Stainless steel cabinet
- Widths: 12", 24", 36", 48"
- Cool-to-the-touch" front s/s edge
- Adjustable stainless steel legs, non-skid feet
- Easy to remove full width crumb tray
- Shipped standard Natural gas, LP conversion kit included

Technical Data

Model	Gas Type	Burners	Total BTU	Overall Dimensions	Net Weight	Package Size	Shipping Weight
SP-CB 12-M	Natural Gas/ Liquid Propane	1	35,000	12" x 28.7"x15.5" 30.4 x 72.8 x 39.4cm	69 lbs 31 kg	15.75"x3 3.5"x19.25" 40x85x49 cm	102lbs 46 kg
SP-CB24-M	Natural Gas/ Liquid Propane	2	70,000	24" x 28.7"x15.5" 60.9x 72.8 x 39.4cm	111 lbs 50 kg	27.5"x3 3.5"x19.25" 70x85x49 cm	158 lbs 72 kg
SP-CB 36-M	Natural Gas/ Liquid Propane	3	105,000	36" x 28.7"x15.5" 9 1.4x72.8 x 39.4cm	154 lbs 70 kg	39.5"x3 3.5"x19.25" 100x85x49 cm	213 lbs 97 kg
SP-CB48-M	Natural Gas/ Liquid Propane	4	140,000	48" x 28.7" x 15.5 122 x 72.8 x 39.4cm	198 lbs 90 kg	51.25"x3 3.5"x19.25" 130x85x49 cm	269 lbs 122 kg

Dimensions

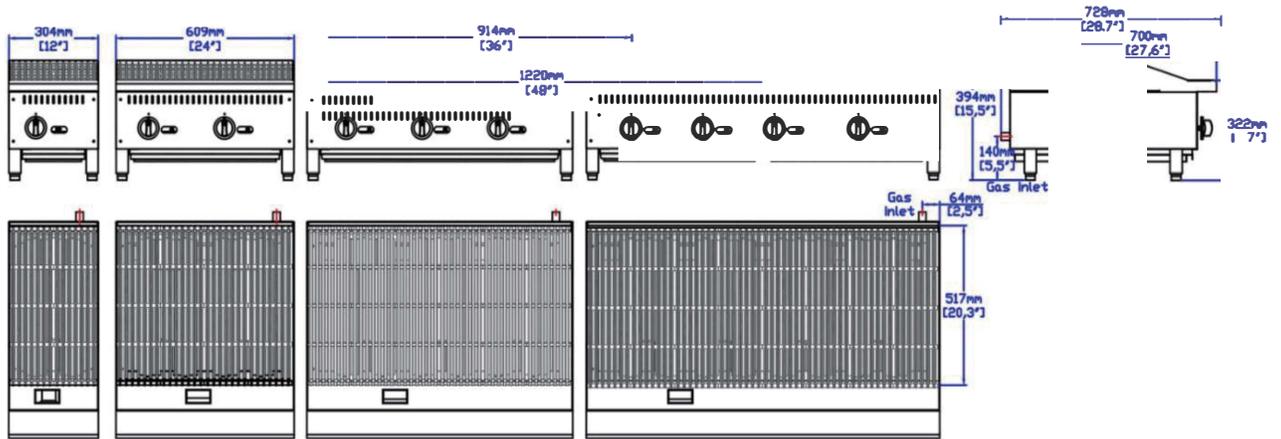

- This appliance is manufactured for commercial installation only, not intended for home use.
- 3/4" NPT rear gas connections. Supply gas pressure not to exceed 14" W.C.(1/2 PSI) Natural gas operating pressure - 4.0" W.C, Recommended supply pressure 7-9" W.C Propane gas operating pressure - 10.0" W.C, Recommended supply pressure 11-12" W.C
- A gas pressure regulator supplied with unit must be installed.
- An adequate ventilation system is required for Commercial Cooking Equipment.
- Require a 6" clearance at both side and rear adjacent to combustible construction.
- CSA design certified NSF listed.

Certifications



OLDACH
REFRIGERATION, AIR CONDITIONING & VENTILATION SUPPLIER

www.sterlingprofessionalpr.com

