



728 Calle C, Parque Industrial Mario Julia, San Juan, PR 00920

Tel. 787-522-1011

Sterling Gas Griddle - Manual Control



Model: SP-G36-M

The countertop line includes Griddle, Charbroiler, and Hot plate that can be adjusted to line up with even height for a great appearance in any cooking application. With robust construction, continuous output, and operator friendly controls, all equipment meets all commercial cooking demands!


Features

- Five specifications of 12 "24" 36" 48" 60 "on models. 30,000, 60,000, 90,000, 120,000, 150,000BTU/h
- Gas control knob every 12"
- 3/4 " griddle plate, Standing pilot ignition system
- Cool-to-the-touch front S/S edge
- All stainless steel cabinet
- Back and side splash guards fully welded to griddle plate
- Adjustable stainless steel non-skid feet
- Easy to remove 4 1/2 quart grease drawer with weep hole
- Shipped standard Natural gas, LP conversion kit included

Technical Data

Model	Gas Type	Burners	Total BTU	Overall Dimensions	Net Weight	Package Size	Shipping Weight
SP-G12-M	Natural Gas/ Liquid Propane	1	30,000	12"x28.7"x15.4" 30.4x72.8x39.4 cm	99 lbs 45 kg	15.75"x33.5"x19.25" 40x85x49 cm	122 lbs 55 kg
SP-G24-M	Natural Gas/ Liquid Propane	2	60,000	24"x28.7"x15.4" 60.9x72.8x39.4 cm	151 lbs 68.6 kg	27.5"x33.5"x19.25" 70x 85x49 cm	203 lbs 92 kg
SP-G36-M	Natural Gas/ Liquid Propane	3	90,000	36"x28.7"x15.4" 91.4x72.8x39.4 cm	220 lbs 100 kg	39.5"x33.5"x19.25" 100x85x49 cm	285 lbs 129 kg
SP-G48-M	Natural Gas/ Liquid Propane	4	120,000	48"x28.7"x15.4" 122x72.8x39.4 cm	284 lbs 129 kg	51.25"x33.5"x19.25" 130x85x49 cm	361 lbs 164 kg
SP-G60-M	Natural Gas/ Liquid Propane	5	150,000	60"x28.7"x15.4" 153x72.8x39.4 cm	339 lbs 154 kg	63" x33.5"x17.25" 160x85x49 cm	466 lbs 207 kg

Dimensions

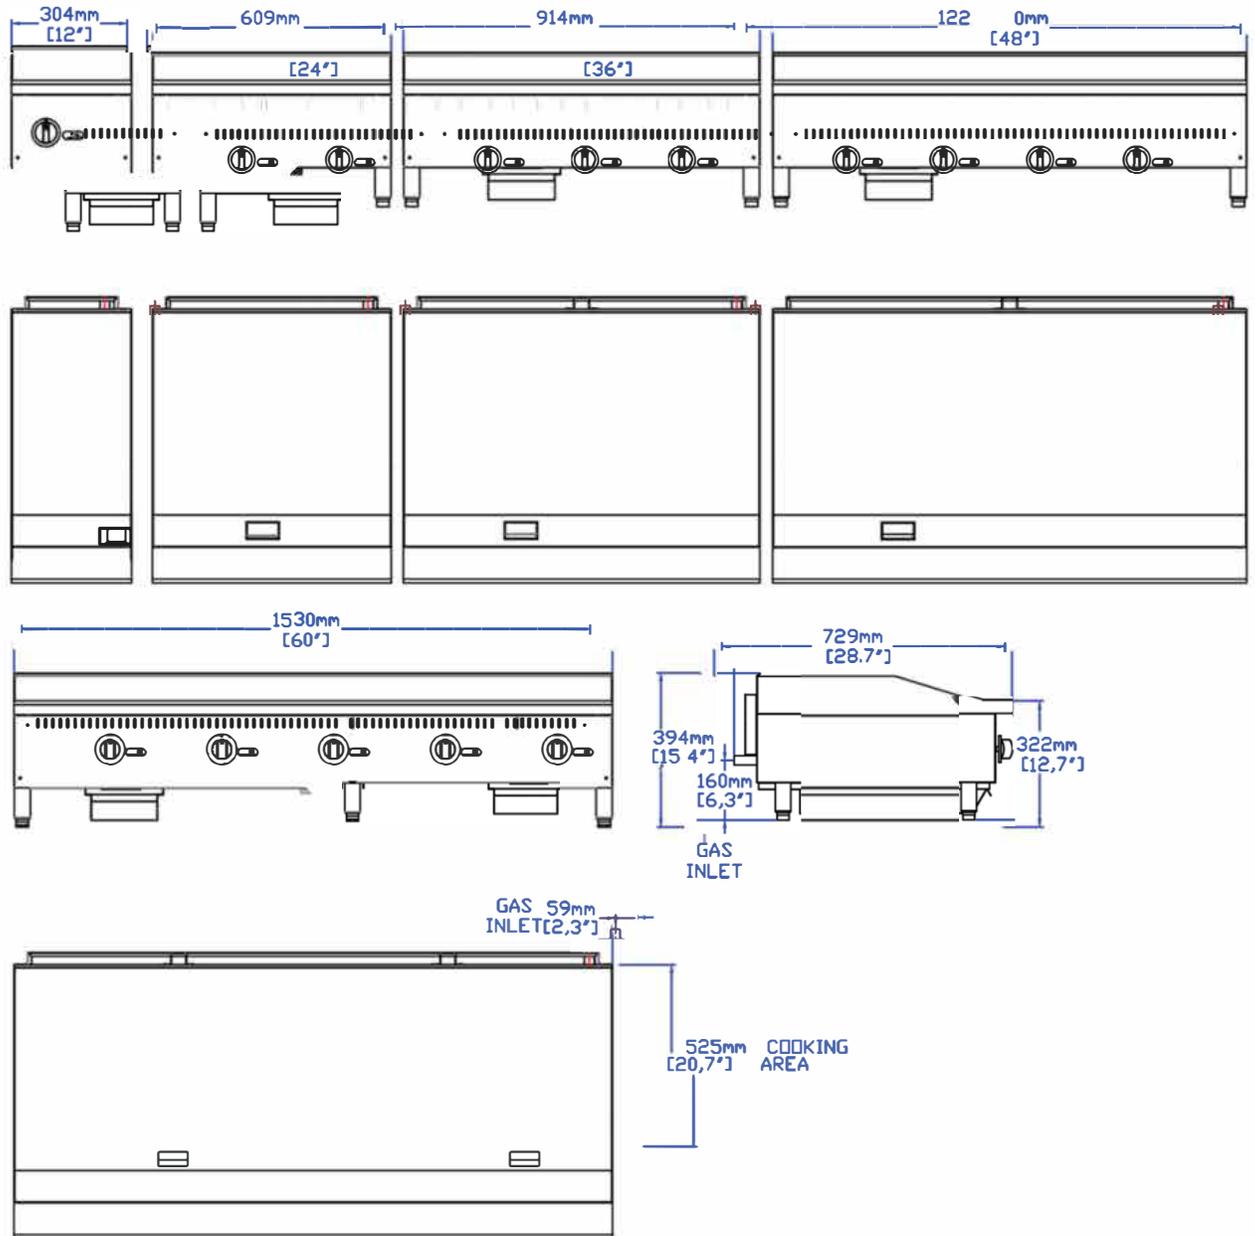

- This appliance is manufactured for commercial installation only, not intended for home use.
- 3/4" NPT rear gas connections. Supply gas pressure not to exceed 14" W.C.(1/2 PSI) Natural gas operating pressure - 4.0" W.C, Recommended supply pressure 7-9" W.C Propane gas operating pressure - 10.0" W.C, Recommended supply pressure 11-12" W.C
- A gas pressure regulator supplied with unit must be installed.
- An adequate ventilation system is required for Commercial Cooking Equipment.
- Require a 6" clearance at both side and rear adjacent to combustible construction.
- CSA design certified NSF listed.

Certifications



www.sterlingprofessionalpr.com



OLDACH
REFRIGERATION, AIR CONDITIONING & VENTILATION SUPPLIER