



728 Calle C, Parque Industrial Mario Julia, San Juan, PR 00920

Tel. 787-522-1011

Sterling Wall Mount Pushbar Water Fountain

Model: WC8P



Features

- The unit delivers chilling capacity 8.0 GPH of 50°F drinking water, based upon 68°F inlet water and 77°F ambient.
- Lead-free 304 stainless steel waterway
- 4 Pushbars in the front and sides for bubbler activation
- Vandal resistant 304 stainless steel bubbler to prevent contamination, airborne deposits and tampering.
- Heavy duty 304 stainless steel frame
- ADA compliant water cooler
- Wall mounted (on wall), for indoor applications

Cooling System

Ice Tank Cooling

This cooling technology is high performance. It cools considerable quantities of water and enables the dispensing temperature to be kept constant even when continuously dispensing many litres.

Compressor

Hermetically-sealed, reciprocating type single phase, sealed-in lifetime lubrication.

Condenser

Fan cooled, copper tube with aluminum fins. Fan motor is permanently lubricated.


Refrigerant Control

Refrigerant HCF-134a is controlled by accurately calibrated capillary tube.

Temperature Control

Easily accessible enclosed adjustable thermostat is factory pre-set. Requires no adjustment other than for altitude requirements.

Dimensions

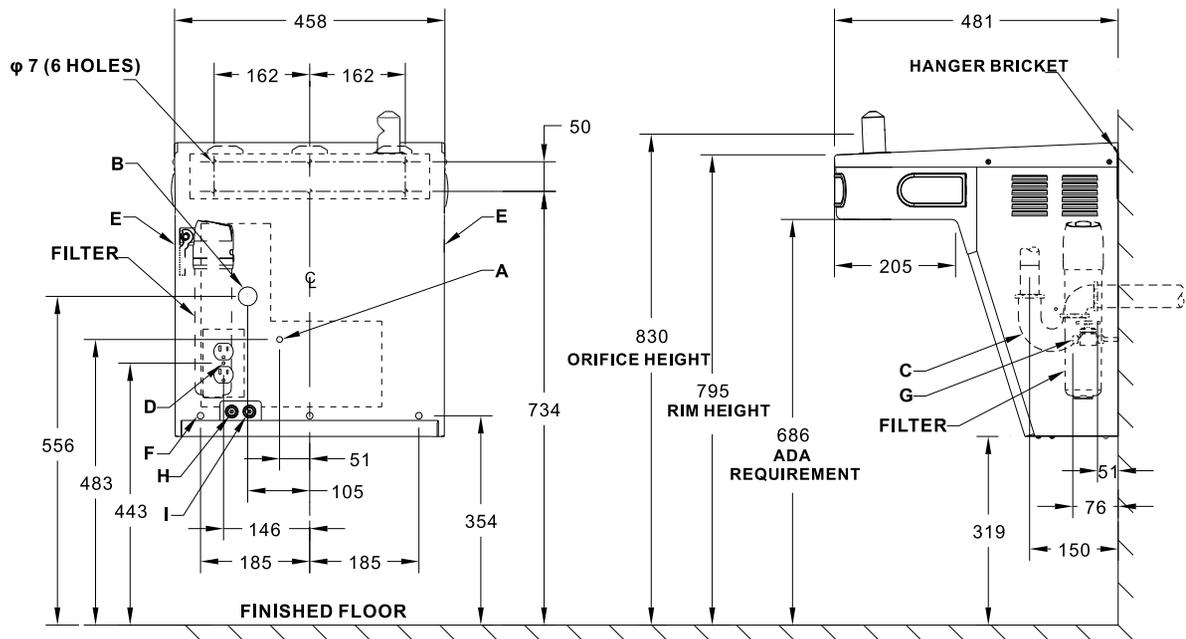

Technical Data

Model	WC8P
Finish	304 Stainless Steel
No. of Stations Served	1
Filter / UV Sterilizer	Optional
Bubbler Style	Vandal-resistant Stainless Bubbler
Activation by	4 Electronic Pushbars in front and sides
Mounting Type	Wall Mount(On Wall)
Power	115V/60Hz or 220V/50Hz
Cold Water Temperature	38-50°F (3-10 °C)
Cooling Capacity	8GPH(30L/H)
Refrigerant Gas	R134a
Rated Watts	230W(8GPH)
Working Room Temperature	41-107.6°F (5-42°C)
Dimensions(LxWxH)	18x19x21.7IN
Approx. Shipping Weight	51lbs / 23kg

Certifications



OLDACH
REFRIGERATION, AIR CONDITIONING & VENTILATION SUPPLIER



www.sterlingprofessionalpr.com